

ProTerra™ REGULAR STRENGTH

STEP UP TO RELIABILITY AND DURABILITY

Achieve a durable, crack-resistant subfloor that stands the test of time with BoldStep ProTerra™ Regular Strength underlayment. Take projects to the next level with ProTerra's streamlined application process and high-quality performance. ProTerra™ Regular Strength underlayment combines fire resistance and sound attenuation with high compressive strengths to reliably meet today's construction demands.

WHY CHOOSE PROTERRA™?

Unlimited Scalability: Offering scalable solutions for individual builds and massive developments.

Lasting Durability: Designed for strength and longevity to ensure long-term results.

Reliable Performance: Build confidently, backed by ProTerra's consistent quality every time.

Professional-Grade: Specifically tailored to meet the needs of contractors and construction experts.

Compressive Strength: Fulfills requirements of 2,000 - 3,200 psi and flows smoothly.


Meet Deadlines: Exceed expectations, and build with ProTerra™.

APPLICATION USE:

Construction Type
Multifamily and light commercial construction

Project Type
Commercial wood frame and pre-cast, poured in place, pre-stressed concrete construction, concrete repair/renovation, steel decks

Subfloor
Interior wood, concrete and steel

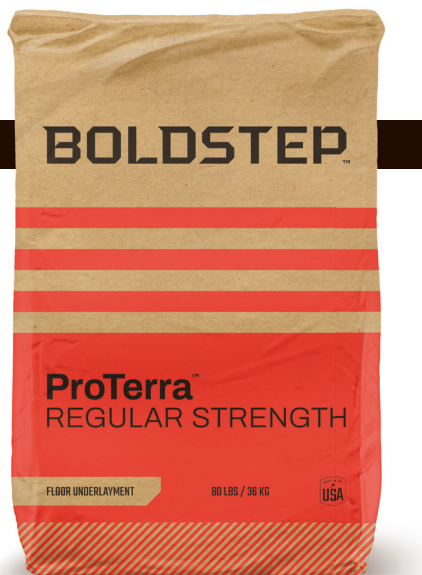

PRODUCT TESTING

Compressive Strength	2,000 - 3,200 psi (13.8 - 22.1 MPa)
Dry Density	110-120 lbs/ft³ (1762-1922 kg/m³)
Installation Depths	¾" - 3" (19-76 mm) For deeper pours, contact BoldStep
Fire Performance (ASTM E84)	Flame Spread - 0 Fuel Contribution - 0 Smoke Development - 0

Proceed Boldly with BoldStep

Choose the subfloor solutions that work as hard as you do. Count on the durability, reliability, and performance of BoldStep ProTerra™ to simplify workflows and keep projects in step.

UL FIRE RESISTANCE-RATED DESIGNS

UL Design					
L528	L579	L547	L501	L540	M518
L546	M508	L570	L502	L541	M519
L563	L518	L589	L512	L569	G561
L576	L530	M502	L520	L593	G560

ULC Design					
L003	L511	M500	M503	M520	I530
L201	L512	M501	M514	M521	I533

For more information on current UL and ULC Designs, contact BoldStep.

LEED INFORMATION

For information regarding how BoldStep ProTerra RS may earn points toward LEED certification, contact us at 800-818-4864 or visit boldstep.co

INSTALLATION & LIMITATIONS

For comprehensive installation instructions and limitations, refer to the technical data sheet available at boldstep.co.

PACKAGING

Available in 80 lbs (36 kg) bags.

FIRE RATINGS

Certified by Underwriters Laboratories International under UL ER #41597. For detailed UL and fire assembly information, consult the technical data sheet.

PRO TIP

Install BoldStep ProTerra RS after drywall is in place to seal room perimeters and ensure noise stays exactly where it belongs.



ProTerraTM
REGULAR STRENGTH

©2025 BoldStep SS020-02/25



28150 N Alma School Road
Suite #103-626
Scottsdale, AZ 85262

T: 800-818-4864
boldstep.co
info@boldstep.co



BOLDSTEPTM